



Time Comparison Based on New PM Schedule

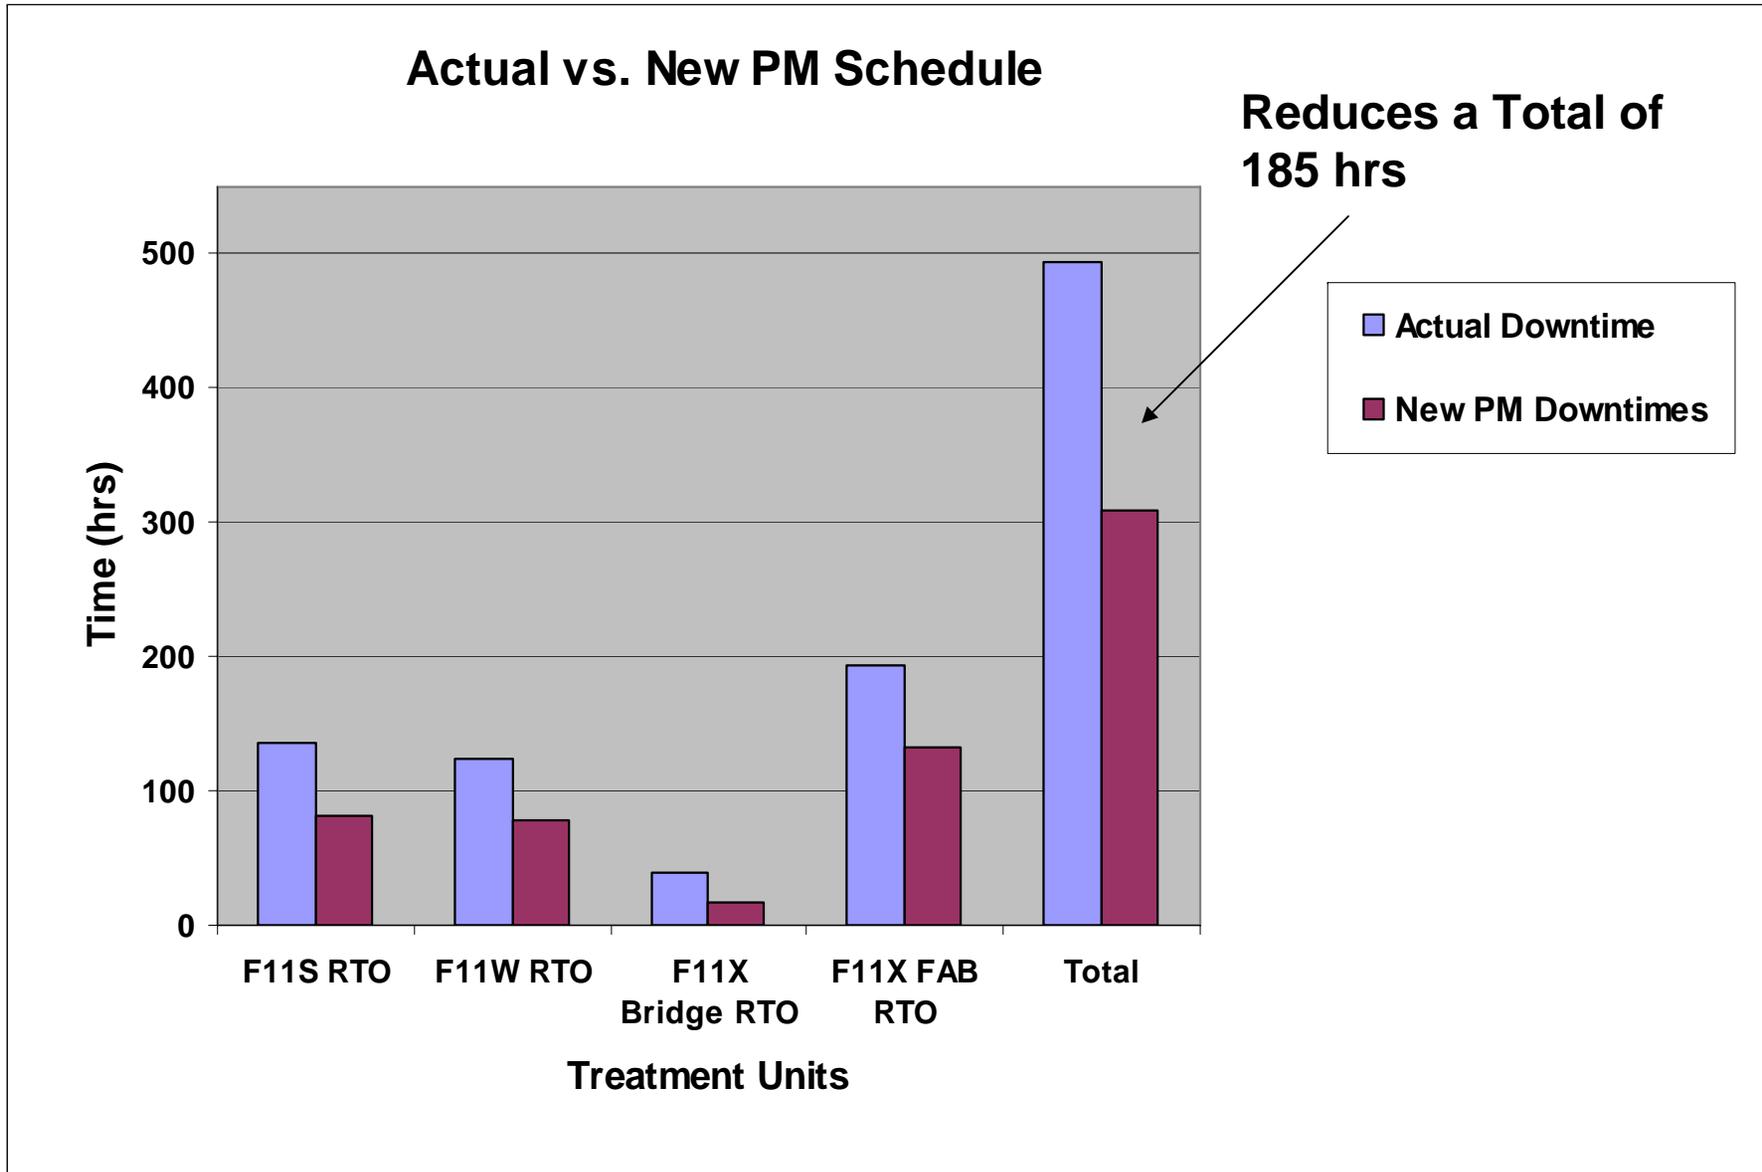

Emissions Comparison Based on New PM Schedule

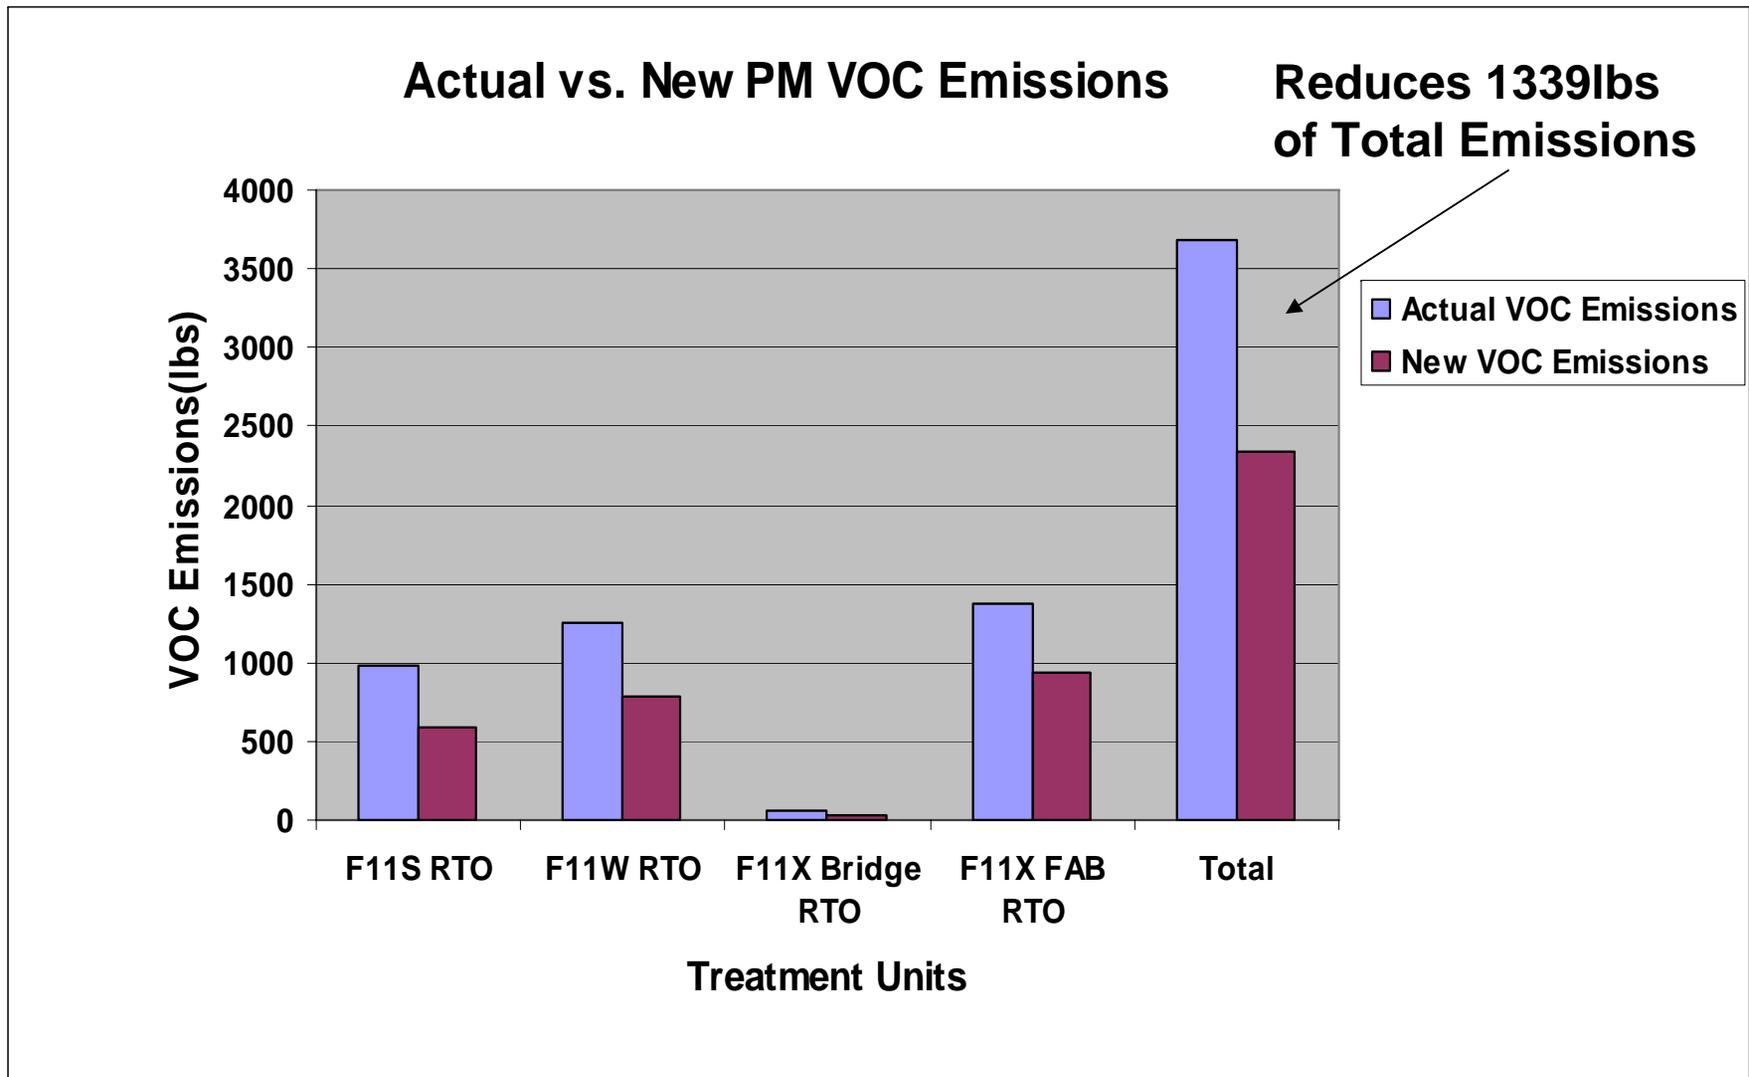

Summary

- Assumptions
 - Reviewed all Scheduled down times in 2004 and followed new PM schedule
 - Best case scenarios
- Reductions
 - Reduce Total VOC emissions by 1339 lbs or 39%
 - Reduce Total 185 Hours

Time and VOC Comparisons Based on New PM Schedule

| | Actual Downtime(hrs) | New PM Downtimes(hrs) | Actual VOC Emissions (lbs) | New VOC Emissions(lbs) |
|------------------------|-----------------------------|------------------------------|-----------------------------------|-------------------------------|
| F11SRTO | 135.8 | 80.8 | 981 | 584 |
| F11W RTO | 124.4 | 78.4 | 1256 | 792 |
| F11X Bridge RTO | 39.75 | 17.75 | 66.0 | 29 |
| F11X FAB RTO | 193.6 | 131.6 | 1376.5 | 936 |
| Total | 493.55 | 308.55 | 3679.5 | 2340 |